



Taper šipke

Taper šipke su deo pribora za bušenje iz asortimana kompanije P&V. Proizvode se od čelika koji dolazi iz sopstvene čeličane, originalnom metodom valjanja čelika, karburizovane su celom dužinom što povećava čvrstoću, a samim tim i radni vek - dužinu trajanja i smanjuje troškove rada.


Taper šipke su šestougaone šipke sa konusom na vrhu, na koji se nastavlja odgovarajuća krana. Konusi mogu biti 7 i 12 stepeni. Prihvat alata je 22x108, a dužine su od 600 mm do 4800 mm.

Primena:

- Kamenolomi
- Rudnici
- Tunelogradnje




7° TAPER RODS 108 x 22mm (4 1/4" x 7/8") SHANK - 22mm HEX BODY

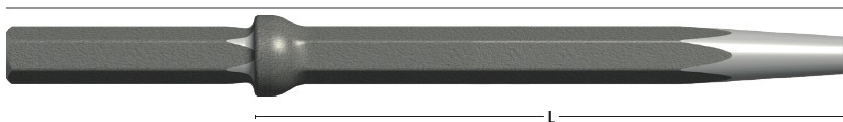

LENGTH (L)	CAT. NUMBER
600mm (2')	5034-0206
915mm (3')	5034-0209
1220mm (4')	5034-0212
1830mm (6')	5034-0218
2145mm (7')	5034-0221
2435mm (8')	5034-0224
3050mm (10')	5034-0231
3660mm (12')	5034-0236
4000mm (13' 1/8")	5034-0240

12° TAPER RODS 108 x 22mm (4 1/4" x 7/8") SHANK - 22mm HEX BODY



LENGTH (L)	CAT. NUMBER
600mm (2')	5034-0306
915mm (3')	5034-0309
1220mm (4')	5034-0312
1600mm (5' 3")	5034-0316
1830mm (6')	5034-0318
2145mm (7')	5034-0321
2435mm (8')	5034-0324
3050mm (10')	5034-0331
3200mm (10' 6")	5034-0332
3660mm (12')	5034-0336
4000mm (13')	5034-0340
4800mm (15' 8")	5034-0348